

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Nov.03,09'	Fanny_qu

**MECHANICAL:**

1. Insertion Force: 35N Max;
2. Withdrawal Force: 10N Min.
3. Durability: 1500 Cycles.

**ELECTRICAL SPECIFICATION:**

1. Rated Voltage And Current: AC 30V Max, 1.0A Per Contact.
2. Insulation Resistance: 1000 MΩ. Min.
3. Contact Resistance: 30mΩ Max.
4. Dielectric Withstanding Voltage: 500V/AC.
5. Operating Temperature: -55°C~+85°C.
6. "▼" Is Important Control Size.

**Ordering information:**



3410-AFLS4 X K


— Contact Plated

- 1 - Tin Plated
- 2 - Gold Flash
- A - 10u" Gold Plating
- B - 15u" Gold Plating
- C - 30u" Gold Plating
- D - 50u" Gold Plating

RoHS COMPLIANT

③	Shell:C2680 Nickel Plating	1
②	Contact:C5191 Nickel/Gold Plating	4
①	Housing:LCP+30% GF UL94V-0 Color:Black	1
ITEM	DESC	Q'TY

 <b>威納電子</b> WINPOINT ELECTRONIC CORP. www.winpoint.com.tw	<b>Title 名稱</b> USB A/F 90° ASSEMBLY SMT+LATCH				
	<b>DR: 制圖</b> Fanny_qu	<b>CHK'D 審核</b> Kenny_shi	<b>APP'D 核准</b> Chen	<b>REV.</b> AO	<b>UNIT</b> mm
<b>PART NUMBER 威納料號</b> Refer to ordering info	<b>CUSTOMER P/N 客戶料號</b> -	<b>DATE 日期</b> Nov.03,09'	<b>GENERAL TOLERANCE 一般公差</b> MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05 UNLESS OTHERWISE SPECIFIED		
<b>DWG NO. 圖號</b> WP009-1411222-B	<b>FILENAME 路徑</b> WP/009	<b>SCALE 比例</b> N/A	 ANGULAR ±3°		

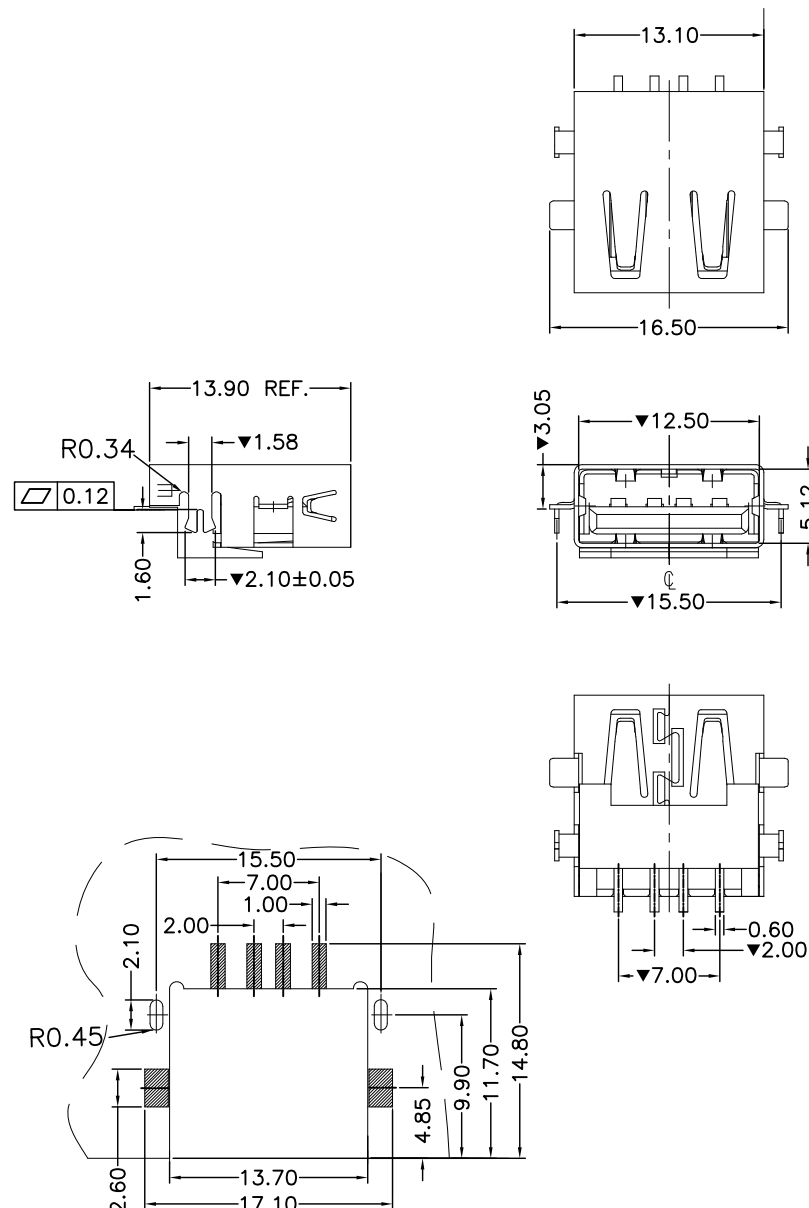

Recommended P.C.B Pattern Layout

W0165-1411007  
B  
C  
D  
E  
F