
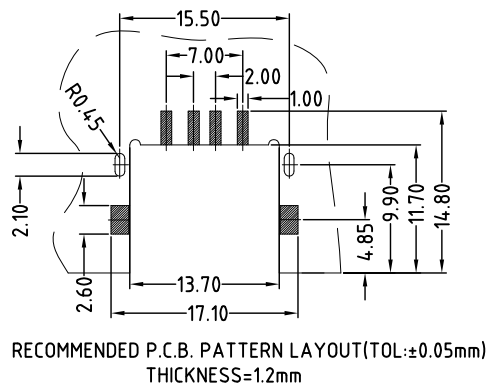
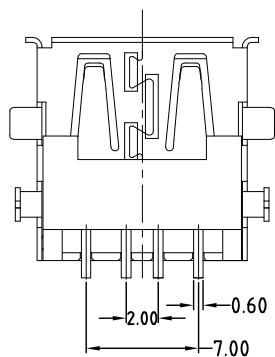


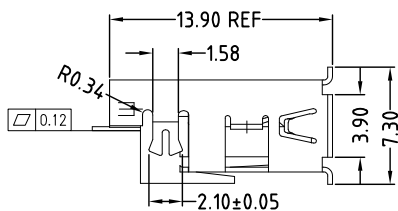


ENG.NO. W0165-1411004

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Oct.15,11'	TANGzc

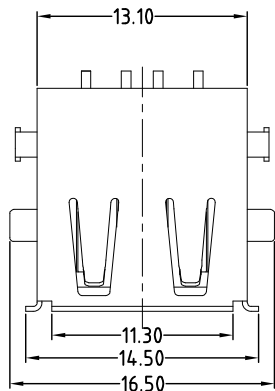

MECHANICAL:

1. INSERTION FORCE: 35N Max
2. WITHDRAWAL FORCE: 10N Min
3. DURABILITY: 1500 CYCLES MIN.

ELECTRICAL SPECIFICATION:

1. CURRENT RATING: 1.0AMP AT 500V AC
VOLTAGE RATING: 30V
2. INSULATION RESISTANCE: 1000MΩ Min.
3. CONTACT RESISTANCE: 30mΩ Max.
4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.
5. TEMPERATURE RANGE: -55°C ~ +85°C.
6. "▼" IS IMPORTANT CONTROL SIZE.

Ordering information:

3410-AFLS2 XX X

CONTACT PLATING
02: GOLD FLASH
03: GOLD 3u"
15: GOLD 15u"
30: GOLD 30u"

HOUSING COLOR:
B: BLACK
W: WHITE

RoHS COMPLIANT

③	SHELL: BRASS T=0.30mm PLATING NI OR TIN	1
②	CONTACT: BRASS T=0.25mm PLATING GOLD & TIN OVER NI	4
①	HOUSING: LCP+30%G.F UL94V-0 COLOR SEE PART NO	1
ITEM	DESC	Q'TY

<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>	Title 名稱 USB A/F SMT 90° LOW PROFILE					
	DR: 制圖 TANGzc	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. 版本 A0	UNIT 單位 mm	SHEET 頁數 1/1
PART NUMBER 威納料號 Refer to ordering info		CUSTOMER P/N 客戶料號 -		DATE 日期 Oct.15,11'		GENERAL TOLERANCE 一般公差
DWG NO. 圖號 WP009-1411218-B		FILENAME 路徑 WP/009		SCALE 比例 N/A		<p>ANGULAR ±3° UNLESS OTHERWISE SPECIFIED</p>
						<p>MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05</p>