
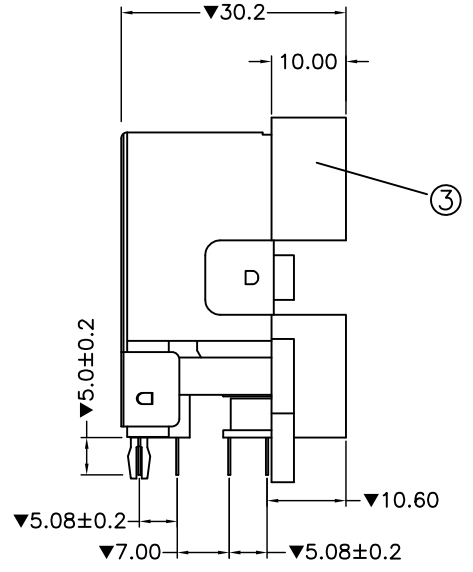




ENG.NO. W0023-1209402

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Feb.19,10'	Fanny_qu

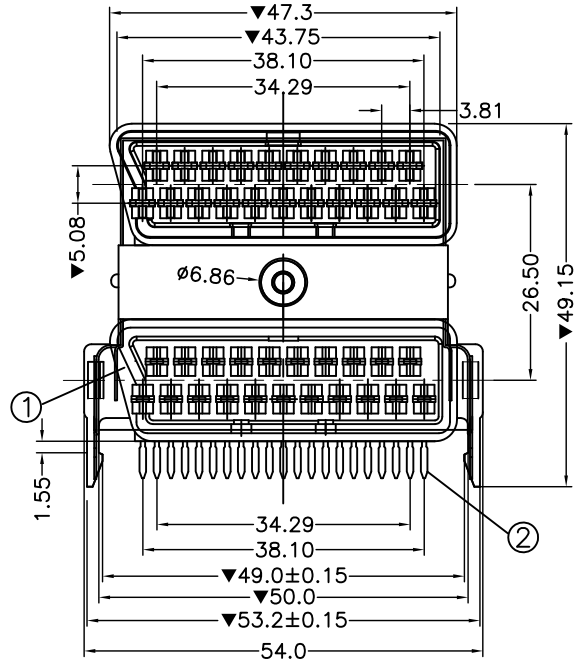

ELECTRICAL SPECIFICATION:

1. RATED VOLTAGE AND CURRENT: AC 250V Max, 3A PER CONTACT.
2. INSULATION RESISTANCE: 5000 MΩ. Min.
3. CONTACT RESISTANCE: 20mΩ Max.
4. DIELECTRIC WITHSTANDING VOLTAGE: 350V/AC.
5. OPERATING TEMPERATURE: -25°C~+60°C.
6. "▼" IS IMPORTANT CONTROL SIZE.

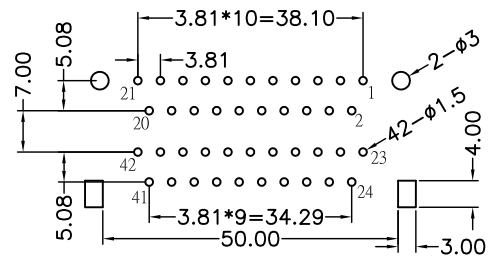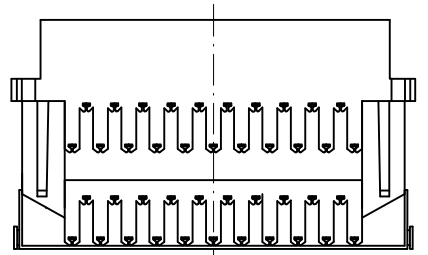

RoHS COMPLIANT

③	IRON SHELL	1
②	CONTACT: BRASS TIN PLATED	42
①	INSULATOR: PC(94V-2)	2
ITEM	DESC	Q'TY

<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>	Title 名稱 DUAL STACK SCART SOCKET RIGHT ANGLE					
	DR: 制圖 Fanny_qu	CHK'D 審核 Kenny_shi	APP'D 核准 Wang	REV. AO	UNIT mm	SHEET 1/1
PART NUMBER 威納料號 3020-12-R1-S	CUSTOMER P/N 客戶料號 -	DATE 日期 Feb.19,10'	GENERAL TOLERANCE 一般公差			
DWG NO. 圖號 WP009-1209593-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	<p>ANGULAR ±3°</p> <p>MM .XX = ±0.38 .XXX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 .XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED</p>			

A4

CUSTOMER DRAWING