

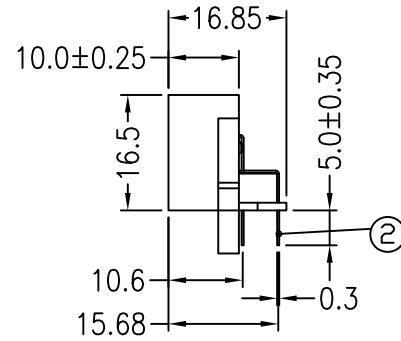
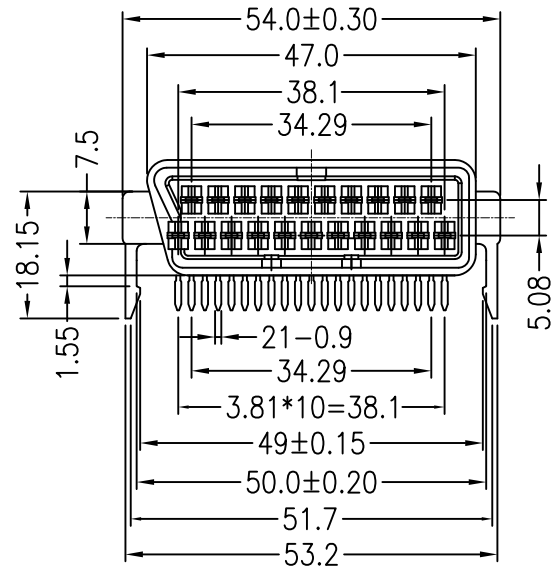


ENG.NO. XXXXXX

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Aug.06,03'	Andy.Lin

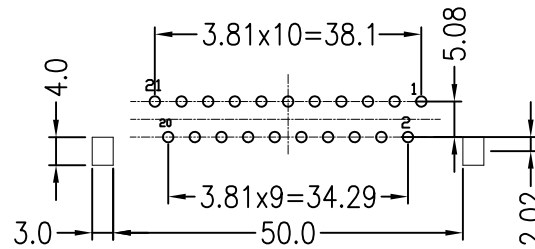

MATERIAL:
 A.INSULATOR:PC &GLASS FIBER
 B.CONTACT:BRASS
 C.CONTACT PLATED:TIN PLATED
 SPECIFICATION:
 A.CURRENT RATE:3A/250V AC
 CONTACT RESISTANCE:
 A.(BRONZE)25mΩ MAX
 B.(PHOSPHOR BRONZE)25mΩ
 C.INSULATOR RESISTANCE: 5000MΩ AT500V DC1Min
 D.dielectric withstanding: 500Vac 1Min

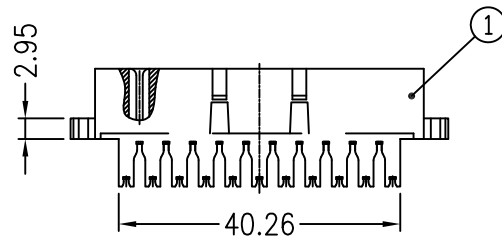

PCB HOLE PATTERN

RoHS COMPLIANT

②	TERMINAL: BRASS	XX
①	HOUSING: PC & GLASS FIBER	XX
ITEM	DESC	Q'TY

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw	Title 名稱 SCART SOCKET PCB MOUNTING TYPE					
	DR: 制圖 Andy.Lin	CHK'D 審核 Kenny_shi	APP'D 核准 Wang	REV. A0	UNIT mm [INCH]	SHEET 1/1
PART NUMBER 威納料號 3020-10-D	CUSTOMER P/N 客戶料號 -	DATE 日期 Aug.06,03'	GENERAL TOLERANCE 一般公差			MM .XX = ±0.38 X.XX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 .XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED
DWG NO. 圖號 WP001-1201332-B	FILENAME 路徑 WP/001	SCALE 比例 N/A	ANGULAR ±3°			

A4

CUSTOMER DRAWING