
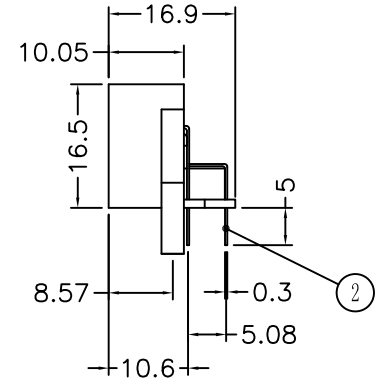




ENG.NO. W0023-1008061

Rev 版本	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	SEP.10,09'	Kenny_shi

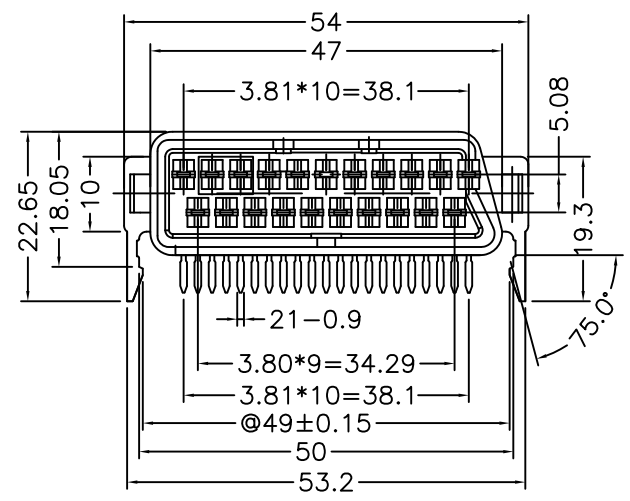

**ELECTRICAL SPECIFICATION:**

1. RATED VOLTAGE AND CURRENT: AC 250V  
3A PER CONTACT.
2. INSULATION RESISTANCE: 5000 MΩ. AT100V DC 1Min
3. CONTACT RESISTANCE: 25mΩ Max.
4. DIELECTRIC WITHSTANDING VOLTAGE: 350V/AC.
5. OPERATING TEMPERATURE: -40°C~+85°C.

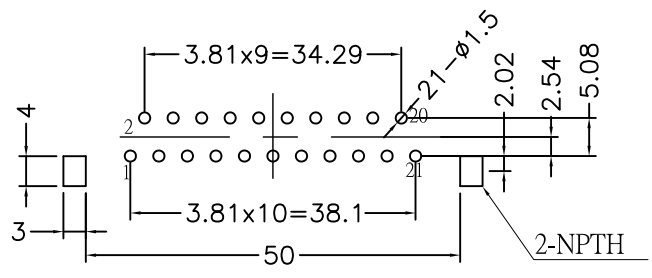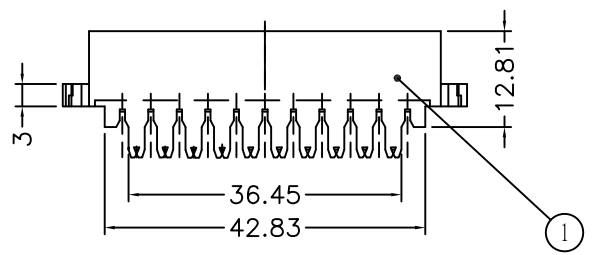

PCB HOLE PATTEN

RoHS COMPLIANT

②	CONTACT: BRASS, TIN PLATED	XX
①	HOUSING: PC 94V-2	XX
ITEM	DESC	Q'TY

<b>威納電子</b> WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		<b>Title 名稱</b> SCART CONNECTOR SINGLE REVERSE TYPE				
DR: 制圖 Kenny_shi	CHK'D 審核 Yuanbin	APP'D 核准 Wang	REV. A0	UNIT mm [INCH]	SHEET 1/1	
PART NUMBER 威納料號 3020-10-R	CUSTOMER P/N 客戶料號 1198A000003MFA	DATE 日期 SEP.10,09'	GENERAL TOLERANCE 一般公差 MM X.X = ±0.38 X.XX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 .XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED			
DWG NO. 圖號 WP004-1008686-B	FILENAME 路徑 WP/004	SCALE 比例 N/A	ANGULAR ±3°			