

XXXX

ENG.NO.

B





C

D


E

F


Rev 版次	Revision note 變更內容	Date 日期	App'd 核准
A/0	Original Release	Feb.15,09'	Andy.Lin

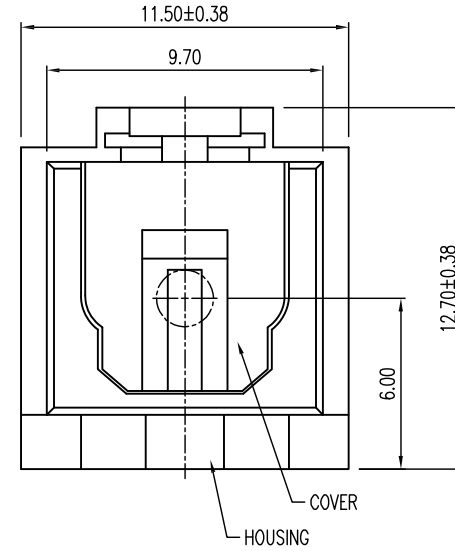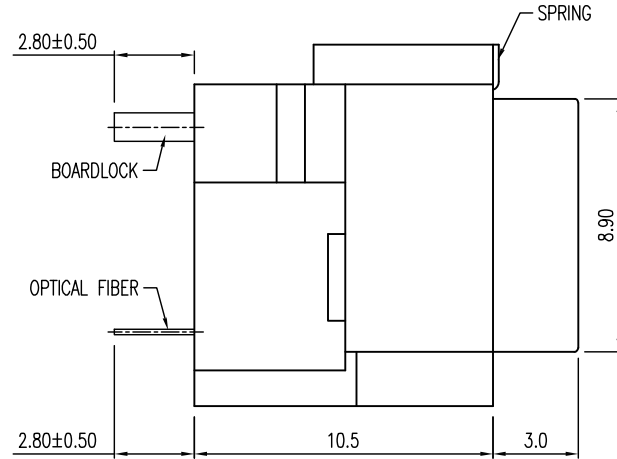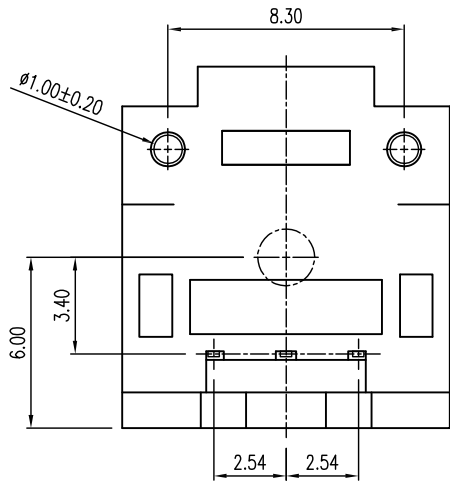

DATE CODE, BLACK COLOR  
 NKXXXX  
 WEEK  
 ex. FIRST WEEK=01...  
 YEAR  
 ex.2009=09...

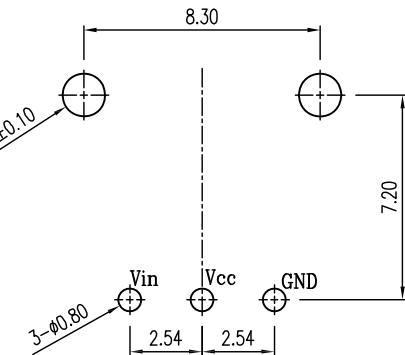

RECOMMENDED P.C.B. LAYOUT  
 (COMPONENT SIDE)

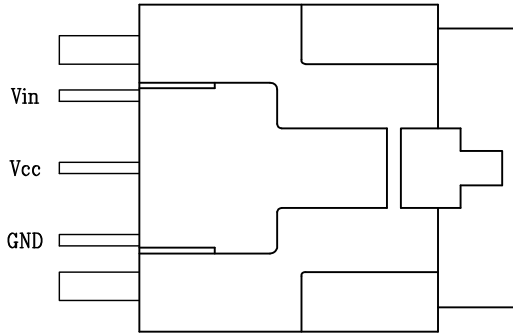

NOTES:

- Features
  - High speed signal transmission ( 13.2Mbps, NRZ signal )
  - +3~+5V power source
- Material
  - Housing & Cover: PBT+30%G.F. color black , UL94V-0
  - Spring: SUS T=0.2
  - Boardlock: Steel , φ1.0 , tin plated
  - Optical Fiber part

3. Device Selection Guide

IC Material	Chip LED λ p(nm)	Operating Voltage (Vcc)	Dissipation Current(mA)		Fiber Coupling Light Output (dBm)	
			Typ.	Min.	Typ.	Max.
Si	650	2.7~5.5	6	-21	-	-15

RoHS COMPLIANT

PART NUMBER INFORMATION:

OF-01-XX-B  
 PLATING:  
 01: GOLD FLASH  
 02: GOLD 30u"  
 06: Tin

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		Title 名稱 OPTICAL FIBER SERIES RECEPTACLE, 180°	
DR 制圖 Chris Lee	CHK'D 檢驗 Andy.Lin	APP'D 確認 Andy.Lin	REV. A/0
PART NUMBER 威納料號 OF-01-XX-B	CUSTOMER P/N 客戶料號 -	CUSTOMER 客戶 -	GENERAL TOLERANCE 一般公差
DWG NO. 圖號 WP004-1007196-B	FILENAME 路徑 WP/004	SCALE 比例 N/A	ANGULAR ±1/2° UNLESS OTHERWISE SPECIFIED