



ENG.NO. W0033-1212442

Rev版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Dec.18,12'	Fanny_qu

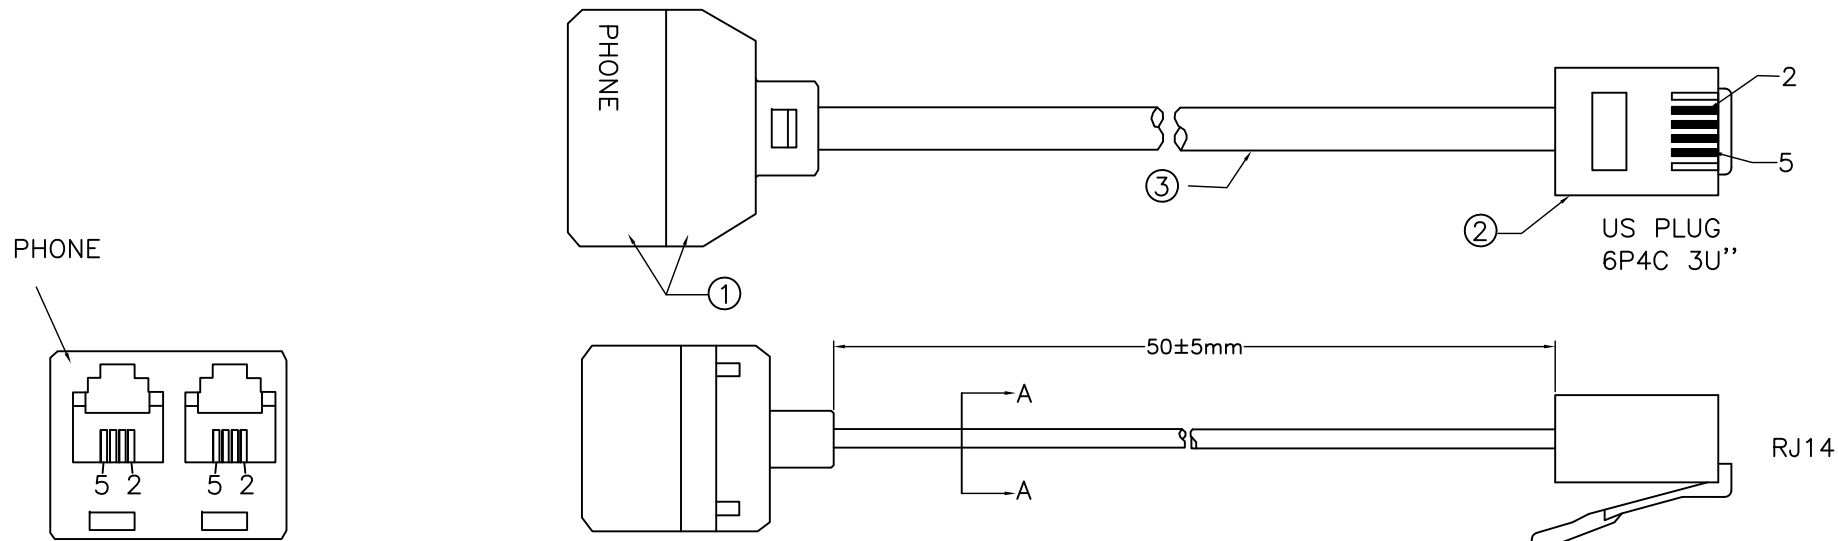

PHONE
LINE1JACK 6P4C 3U"
LINE2JACK 6P4C 3U"

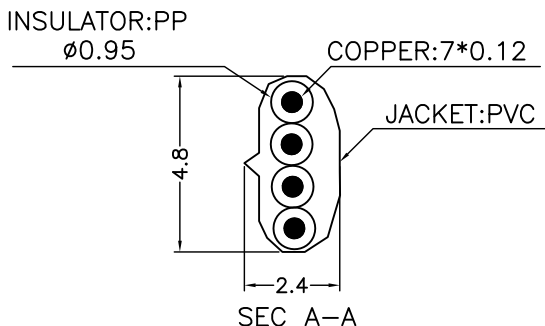

Wiring Method

RJ14	COLOR	LINE1 JACK	LINE2 JACK
2	BLACK	3	/
3	RED	/	3
4	GREEN	/	4
5	YELLOW	4	/

- SPECIFICATION:**
- 1.OPEN/SHORT/MISWIRE:100%
 - 2.CONDUCTION RESISTANCE:5 OHM
 - 3.INSULATION RESISTANCE:10M OHM MIN
 - 4.WITHSTAND VOLTAGE:300V
 - 5.TEMPERATURE RATING:-25~+85°C
 - 6.ROHS COMPLIANT

RoHS COMPLIANT

ITEM	DESC	Q'TY
③	CABLE:#28*4C(black,red,green,yellow)COLOR:GRAY OD:2.4*4.8	1
②	RJ14 CONNECTOR:6P4C PLUG PIN GOLD PLATED 3U"	1
①	CONNECTOR:DUAL JACK ADAPTER 6P4C	1

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		Title 名稱 RJ14CABLE DEMULTIPLEXER	
DR: 制圖 Fanny_qu	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. 日期 A0 Dec.18,12'
PART NUMBER 威納料號 CA2006-14RJ11-50-GY	CUSTOMER P/N 客戶料號 -	DATE 日期 Dec.18,12'	GENERAL TOLERANCE 一般公差 MM .XX = ±0.38 .XXX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 .XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED
DWG NO. 圖號 WP009-1212703-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	ANGULAR ±3°