Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	NOV.30,10'	Lijunhua

ENG.NO. XXXXXX

P/N	Color Layout Front view		
RJ-23AH-001-10	R	W	Y
	R	W	Y
RJ-23AH-002-10	Y	W	R
	Y	W	R
RJ-23AH-003-10	R	B	G
	Y	W	R

Y: Yellow W:White R:Red
B:Blue G:Green

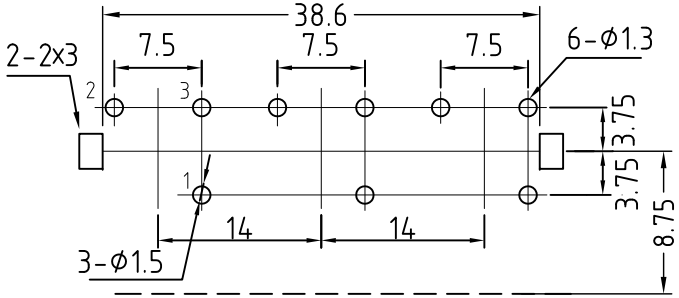

P.C.B LAYOUT
(Jack Top View)

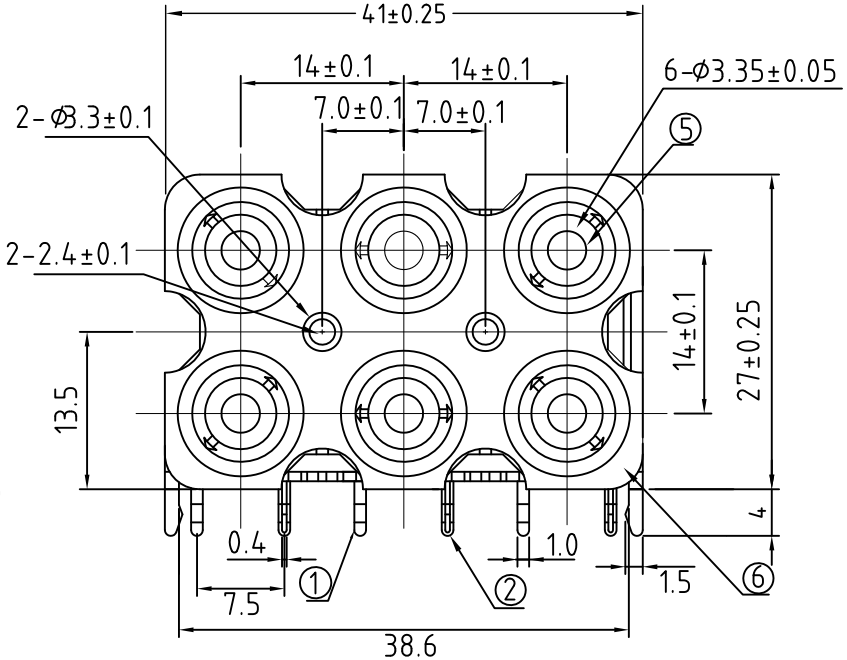

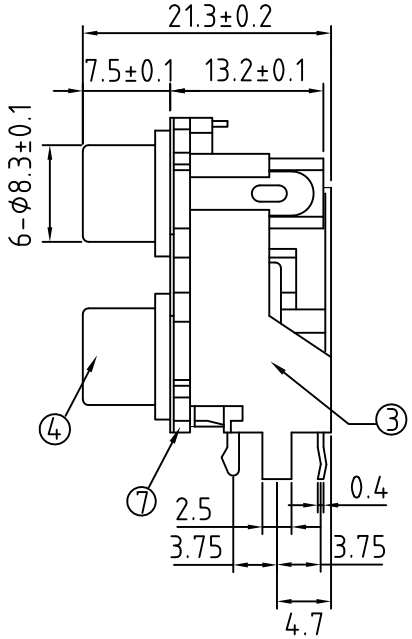

SPECIFICATION:

1. Voltage and Current Rating:50V & 0.3A
2. Contact resistance:30Ω(max)
3. Insulation resistance:100MΩ(min) @ Dc500V
4. Withstand voltage:500VAC for 1min
5. Withdraw force:0.08Kgf (Use a OD=3.2mm and Length=14mm Gauge Plug)
6. Life test:3,000 cycles
7. Temperature Range:-25°C ~ 85°C
8. Other dimensions tolerance are ±0.05mm
9. RoHs Compliant

SCHEMATIC



RoHS COMPLIANT

ITEM	DESC	Q'TY
⑦	FRONT COVER PLATE:ABS.UL 94-0 BLACK.	3
⑥	SHIELD PLATE:BRASS. TIN(OR NiCKEL) PLATING.	3
⑤	WASHER:ABS.UL 94V-0	6
④	SLEEVE:BRASS. TIN PLATING.	3
③	HOUSING:PBT.UL 94V-0 BLACK.	1
②	#2 TERMINAL PHOSPHOR BRONZE TIN PLATING.	3
①	#1 TERMINAL PHOSPHOR BRONZE TIN PLATING.	3

威納電子 WINPOINT ELECTRONIC CORP.
www.winpoint.com.tw

Title 名稱: RCA PIN JACK,2X3 STACKED VERTICAL,DIP

DR: 制圖	CHK'D 審核	APP'D 核准	REV.	UNIT	SHEET
Lijunhua	Kenny_shi	Wang	A0	mm [INCH]	1/1

PART NUMBER 威納料號	CUSTOMER P/N 客戶料號	DATE 日期
RJ-23AH-XXX-10	–	NOV.30,10'

DWG NO. 圖號	FILENAME 路徑	SCALE 比例
WP009-1101836-B	WP/009	N/A

GENERAL TOLERANCE 一般公差
ANGULAR ±3°
MM X.X = ±0.38
X.XX = ±0.18
X.XXX = ±0.05
INCH .XX = ±0.015
.XXX = ±0.007
.XXXX = ±0.0020
UNLESS OTHERWISE SPECIFIED

A4 CUSTOMER DRAWING

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WINPOINT ELECTRONIC CORP. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION