

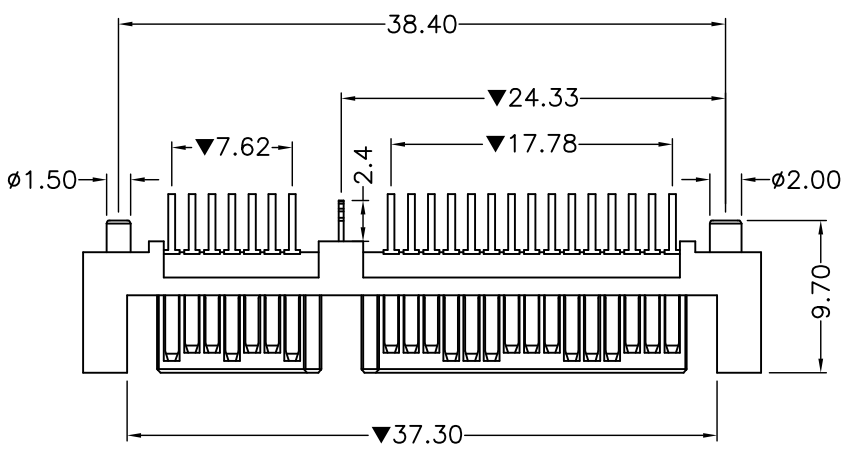


ENG.NO. W0188-1403029

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	May.03,11'	Kenny_shi
A1	Modify the PIN Size	Apr.11,14'	Kenny_shi

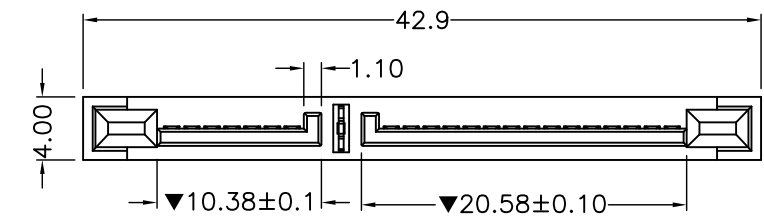

ELECTRICAL SPECIFICATION:

1. Rated Voltage And Current: Ac 100v Max, 1.5A Per Contact.
2. Insulation Resistance: 1000 MΩ. Min.
3. Contact Resistance: 50mΩ Max.
4. Dielectric Withstanding Voltage: 500V/AC.
5. Insertion Force:45N Max
6. Withdrawal Force:10N Min
7. Durability:500 Cycles
8. Operating Temperature: -40°C~+85°C.
- 9."▼" Is Important Control Size.


Ordering information:

SATA01-75-T1-XX-OA2

CONTACT PLATING

- 02 : 2μ GOLD FLASH
- 05 : 5μ" GOLD PLATED
- 10 : 10μ" GOLD PLATED
- 15 : 15μ" GOLD PLATED

RoHS COMPLIANT

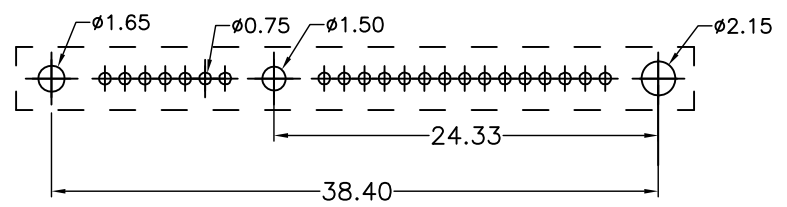

PCB LAYOUT
RECOMMENDED PCB TOLERANCE:±0.05

ITEM	DESC	Q'TY
③	BOARD LOCK:BRASS TIN PLATING	1
②	CONTACT:BRASS GOLD/TIN PLATING	22
①	HOUSING:LCP UL94V-0 COLOR:BLACK	1

<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>	<p>Title 名稱 SATA 7+15 PIN MALE DIP TYPE</p>					
	DR: 制圖 Fanny_qu	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. A1	UNIT mm	SHEET 1/1
PART NUMBER 威納料號 Refer to ordering info		CUSTOMER P/N 客戶料號 -		DATE 日期 Apr.11,14'		<p>GENERAL TOLERANCE 一般公差</p> <p>MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05 UNLESS OTHERWISE SPECIFIED</p>
DWG NO. 圖號 WP009-1404062-B		FILENAME 路徑 WP/009		SCALE 比例 N/A		