




ENG.NO. YWP-7S-56

Rev 版次	Revision note 變更內容	Date 日期	App'd 核准
A/0	Original release	Dec.08.09	Andy.Lin

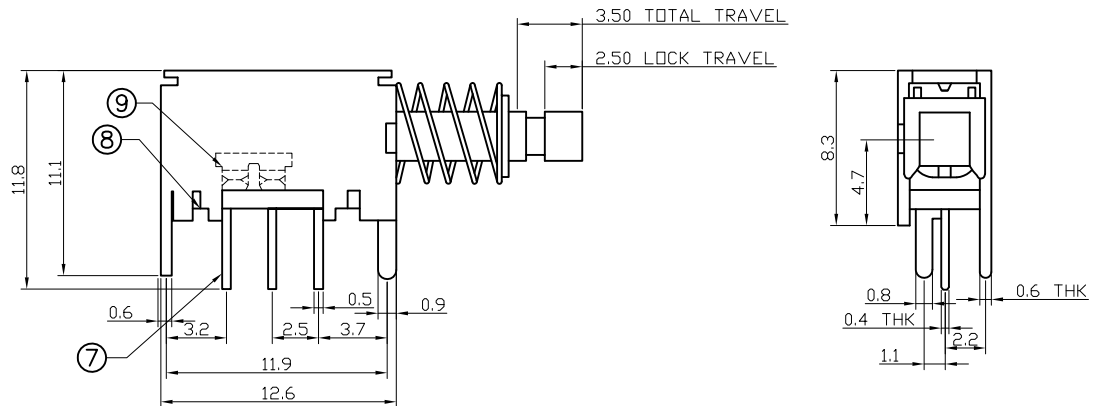

SPECIFICATIONS:

- 1.Rating: 0.3A 50VDC
- 2.Insulation Resistance: 100VDC 100m-Ohms min
- 3.Contact Resistance: 30m-Ohms max.(initial)
- 4.Dielectric Strength: 500VAC For 1 Minute
- 5.Operating Force: 250±100gf
- 6.Life Test: 10,000 Cycles

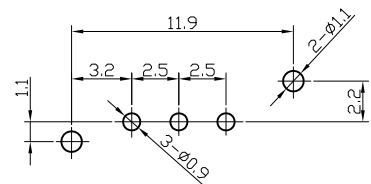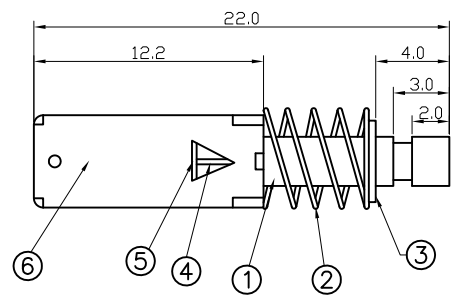

**HOLE LAYOUT
TOP VIEW**

ITEM	DESC	Q'TY
⑨	CONTACT CLIP: PBS AG-PLATED	1PCS
⑧	TERMINAL BASE: PHRNOLIC RESIN NATURAL	1PCS
⑦	TERMINAL: BRASS STRIP AG-PLATED	3PCS
⑥	FRAME: SPCC NI-PLATED	1PCS
⑤	SPRING PLATE: PBS STRIP NATURAL	1PCS
④	LOCK NEEDLE: PBS NIRE NATURAL	1PCS
③	ERING: SPCC NI-PLATED	1PCS
②	SPRING: SUS NI-PLATED	1PCS
①	SLIDER: POM BLUE	1PCS

RoHS COMPLIANT

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		Title 名稱 PUSHBUTTON SWITCH	
DR 制圖 Tianyu	CHK'D 檢驗 Andy.Lin	APP'D 確認 YJ.Lin	REV. A/0
PART NUMBER 威納料號 PS-35-KX-10	CUSTOMER P/N 客戶料號 -	CUSTOMER 客戶 -	GENERAL TOLERANCE 一般公差 MM .XX = ±0.38 X.XX = ±0.12 X.XXX = ±0.051 INCH .XX = ±0.15 .XXX = ±0.005 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED
DWG NO. 圖號 PS-35-KX-10	FILENAME 路徑 C dwg/CN	SCALE 比例 N/A	ANGULAR ±1/2°

CUSTOMER DRAWING