
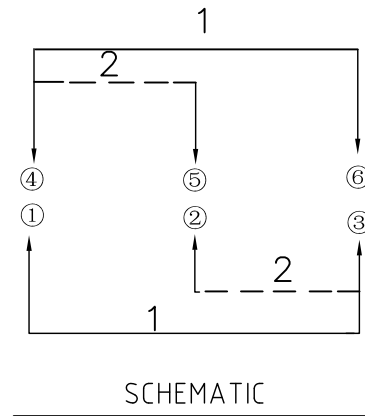
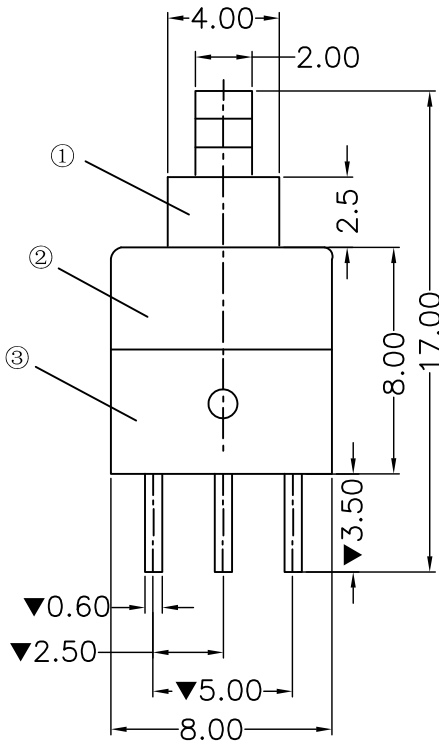


ENG.NO. W0209-1503028


Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Aug.27,14'	Chenyq

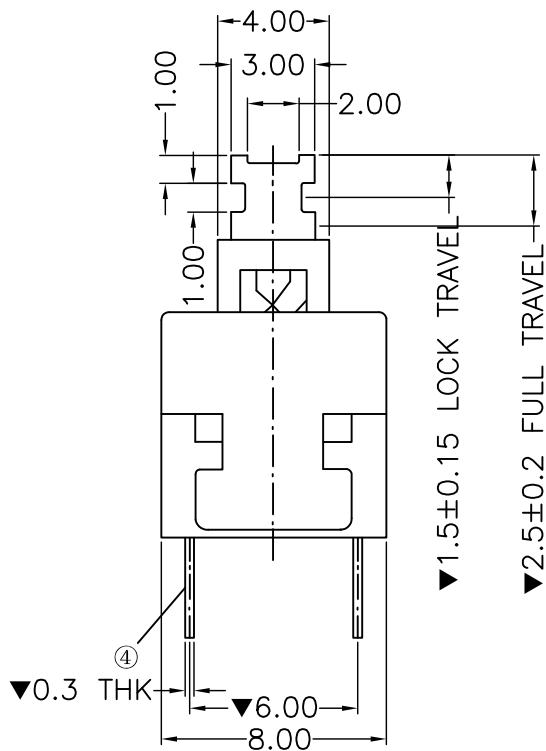

ELECTRICAL SPECIFICATION:

- Rated Voltage And Current: DC 12V Max, 2A Per Contact.
- Insulation Resistance: 100 MΩ. Min.
- Contact Resistance: 70mΩ Max.
- Dielectric Withstanding Voltage: 500V/AC.
- Operating Temperature: -25°C~+85°C.
- "▼" Is Important Control Size.
- Durability: 10000 Cycles.
- Operating Force: 300 gf

RoHS COMPLIANT



Recommended P.C.B layout

⑦	Spring	1
⑥	Contact 2:C5210R-EH Ag Plating	2
⑤	Cam Stick:SUS Wire Washing	1
④	Contact 1:Brass Alloy Ag/Nickel Plating	4
③	Case:PBT UL94V-0 Color:Black	1
②	Cover:POM UL94V-0 Color:White	1
①	Knob:POM UL94V-0 Color:Blue	1
ITEM	DESC	Q'TY

<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>	Title 名稱 VERTICAL PUSH SWITCH(DPDT)					
	DR: 制圖 Chenyq	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. AO	UNIT mm	SHEET 1/1
PART NUMBER 威納料號 PSA1330SD-A1B	CUSTOMER P/N 客戶料號 -	DATE 日期 Aug.27,14'	GENERAL TOLERANCE 一般公差 MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05 UNLESS OTHERWISE SPECIFIED			
DWG NO. 圖號 WP009-1503302-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	<p>ANGULAR ±3°</p>			