



Rev 版次	Revision note 變更內容	Date 日期	Signature 簽名	Checked 核准
A/0	Original Release	051106	WQ	ZX
A/1	Acuator for Material Change	080421	WQ	ZX

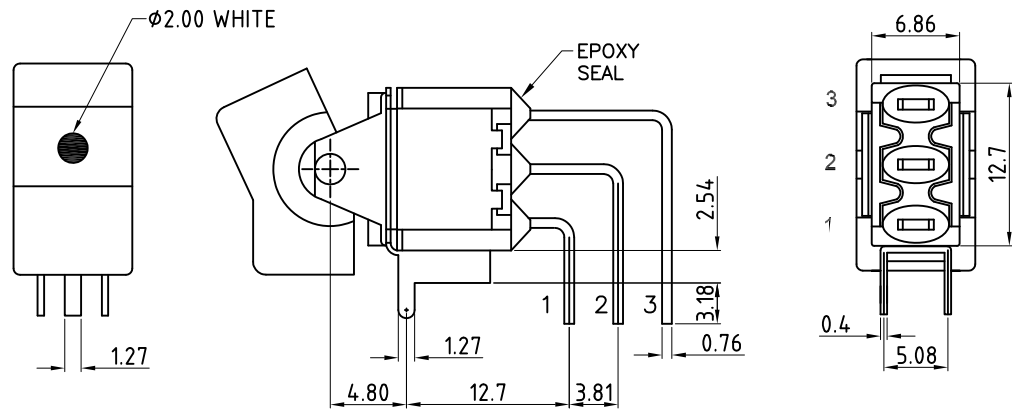

RATING:
R:0.4 Volt-Amps(VA)max.@20V max.(ACorDC)
Q:2Amps@250VAC
5Amps@120VAC or 28 VDC



P.C.MOUNTING

SWITCH FUNCTION

Model No.	POS.1	POS.2	POS.3
PS-7101J1AV2-1A	ON	NONE	ON
PS-7101J1AV2-2A	ON	NONE	(ON)
PS-7101J1AV2-3A	ON	OFF	ON
PS-7101J1AV2-4A	(ON)	OFF	(ON)
PS-7101J1AV2-5A	ON	OFF	(ON)
TERM. COMM.	2-3		2-1
SCHEMATIC		OPEN	

SPECIFICATIONS

MECHANICAL LIFE:50,000make-and-break cycles.
CONTACT RESISTANCE:10m
10mA for both silver contacts.
INSULATION RESISTANCE:1,000M
DIELECTRIC STRENGTH:1,500v RMS@sea level.
OPERATING TEMPERATURE:-30°Cto 85°C

MATERIALS

ACTUATOR:Nylon 46, black
BUSHING:Brass,nickel plated.
HOUSING:Stainless Steel.
SWITCHE SUPPORT:Brass,Tin plated
TERMINAL/CONTACT:Brass,Silver plated

RoHS COMPLIANT

Part Number: 威納料號 PS-7101J1AV2-XA		Customer P/n: 客戶料號 --		SCALE 比例 N/a	GENERAL TOLERANCE 一般公差 MM X.X = ±0.38 X.XX = ±0.2 X.XXX = ±0.051 INCH.XX = ±0.15 .XXX = ±0.005 .XXXX = ±0.0020
DRAWN BY WQ	CHK'D BY ZX	APPR'D BY P.LIU	FILENAME \\CAT\SW\RO	DATE 日期 051106	ANGULAR ±1/2°

威納電子 www.winpoint.com.tw		Title 名稱 Miniature Rocker&Paddle Switches		SHEET: 1 OF 1	
WINPOINT ELECTRONIC CORP. TEL: +886-2-29860208 FAX: +886-2-29838555		Dwg.No: 圖號 PS-7101J1AV2-XA		EDITION A/1	UNIT MM