

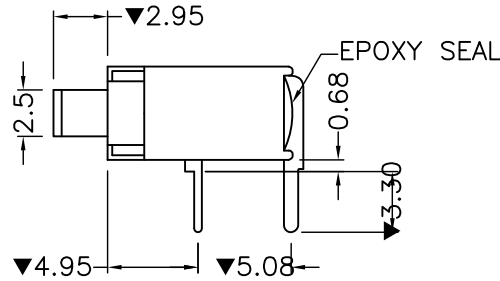


ENG.NO. XXXXXX


Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Aug.27,12'	Fanny_qu

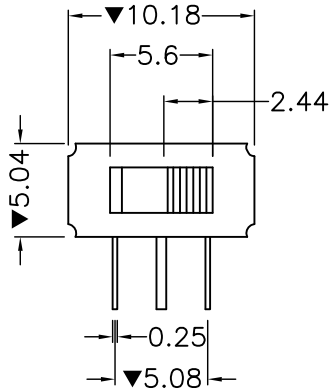


ELECTRICAL SPECIFICATION:

1. Current Rating: 3Amper,
2. Insulation Resistance: 1000 MΩ. Min.
3. Contact Resistance: 30mΩ Max.
4. Dielectric Withstanding Voltage: 500V/AC.
5. Operating Temperature: -30°C~+85°C.
6. Operating Force:10N MAX
7. Life test: A Switch Shall Be Subjected To 6000 Cycles At; A Speed Of 6~8 Cycles For 1 MIN;
- 8."▼" Is Important Control Size.

Schematic



P.C.B MOUNTING



RoHS COMPLIANT

⑥	CASE: DAP UL94V-0
⑤	SLIDE HANDLE:NYLON
④	CENTER CONTACTS :COPPER ALLOY SILVER PLATING
③	END CONTACTS:COPPER ALLOY SILVER PLATING
②	SWITCH SUPPORT: COPPER ALLOY TIN PLATING
①	SHELL:COPPER ALLOY
ITEM	DESC

MODEL No.	SWITCHING POSITION		
SS11-R3-10-Q	ON	NONE	ON
SS13-R3-10-Q	ON	OFF	ON
TERM COMM.	2-3	OPEN	2-1

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		Title 名稱 Spdt Sub-Miniature Slide switches	
DR: 制圖 Fanny_qu	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. AO
PART NUMBER 威納料號 SSXX-R3-10-Q	CUSTOMER P/N 客戶料號 -	DATE 日期 Aug.27,12'	GENERAL TOLERANCE 一般公差 MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05 UNLESS OTHERWISE SPECIFIED
DWG NO. 圖號 WP0009-1307808-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	ANGULAR ±3°