

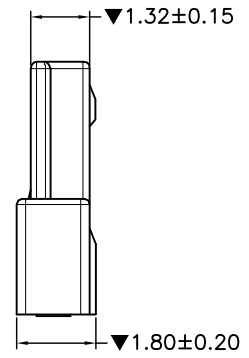
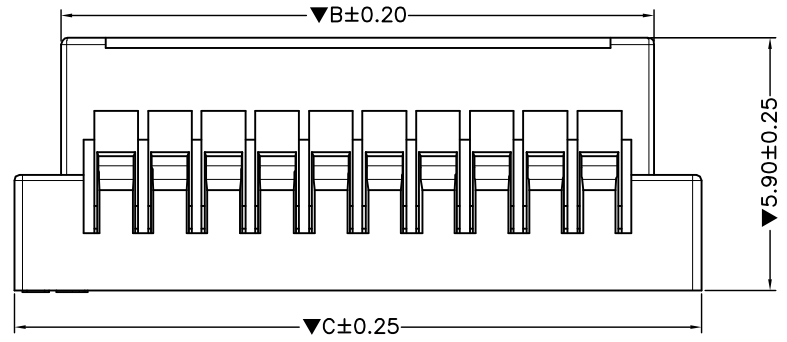
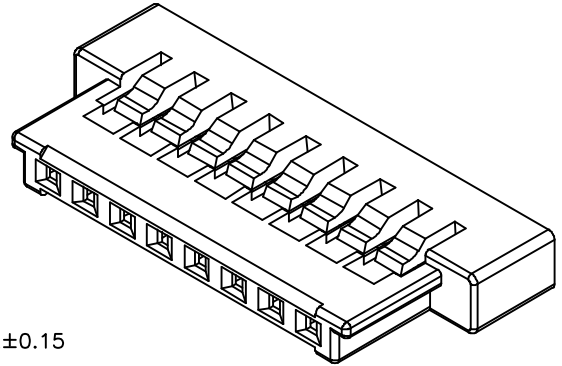


ENG.NO. W0007-1306474

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Apr.17,01'	Fanny_qu

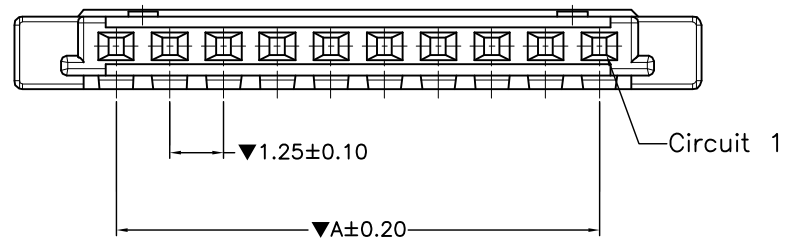

PART NO.	Dimensions(mm)		
	A	B	C
A1255H-02P	1.25	3.80	6.00
A1255H-03P	2.50	5.05	7.25
A1255H-04P	3.75	6.30	8.50
A1255H-05P	5.00	7.55	9.75
A1255H-06P	6.25	8.80	11.00
A1255H-07P	7.50	10.05	12.25
A1255H-08P	8.75	11.30	13.50
A1255H-09P	10.00	12.55	14.75
A1255H-10P	11.25	13.80	16.00
A1255H-11P	12.50	15.05	17.25
A1255H-12P	13.75	16.30	18.50
A1255H-13P	15.00	17.55	19.75
A1255H-14P	16.25	18.80	21.00
A1255H-15P	17.50	20.05	22.25
A1255H-20P	23.75	26.30	28.50
A1255H-25P	30.00	32.55	34.75
A1255H-30P	36.25	38.80	41.00



PRODUCT INFORMATION:

A1255H-XXP

02 TO 30 CONTACT

MATERIAL:

1. Housing:Nylon 66, UL 94V-0, Black;

ELECTRICAL SPECIFICATION:

1. Current Rating: 1A AC,DC
2. Insulation Resistance: 100 MΩ. Min.
3. Contact Resistance: 40mΩ Max.
4. Dielectric Withstanding Voltage: 200V/AC.
5. Operating Temperature: -25°C~+85°C.
6. "▼" Is Important Control Size.

RoHS COMPLIANT

威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw		Title 名稱 1.25mm PITCH HOUSING ULTRA LOW PROFILE	
DR: 制圖 Fanny_qu	CHK'D 審核 Kenny_shi	APP'D 核准 Chen	REV. UNIT SHEET AO mm 1/1
PART NUMBER 威納料號 A1255H-XXP	CUSTOMER P/N 客戶料號 -	DATE 日期 Apr.17,01'	GENERAL TOLERANCE 一般公差 MM X.X = ±0.38 X.XX = ±0.25 X.XXX = ±0.05 UNLESS OTHERWISE SPECIFIED
DWG NO. 圖號 WP009-1306793-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	ANGULAR ±3°

A4

CUSTOMER DRAWING