
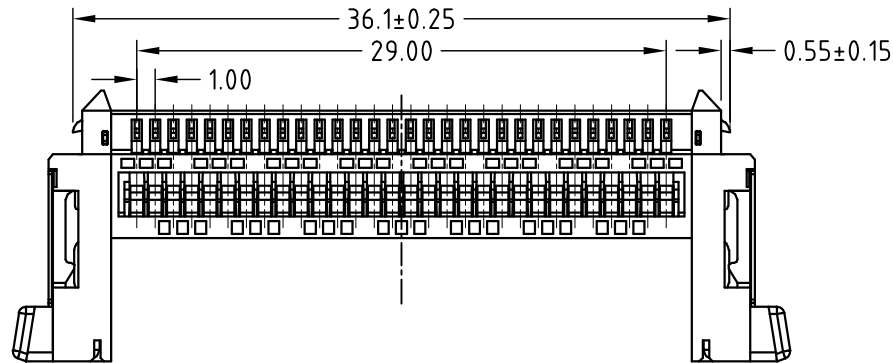
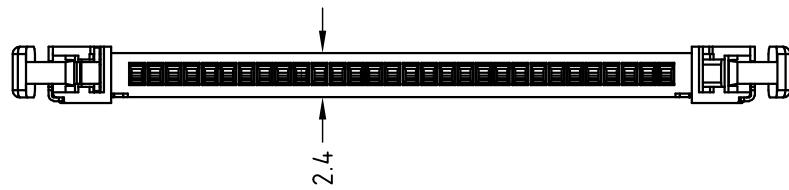


ENG.NO.
W0058-1103171

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Oct.02,07'	Lijunhua

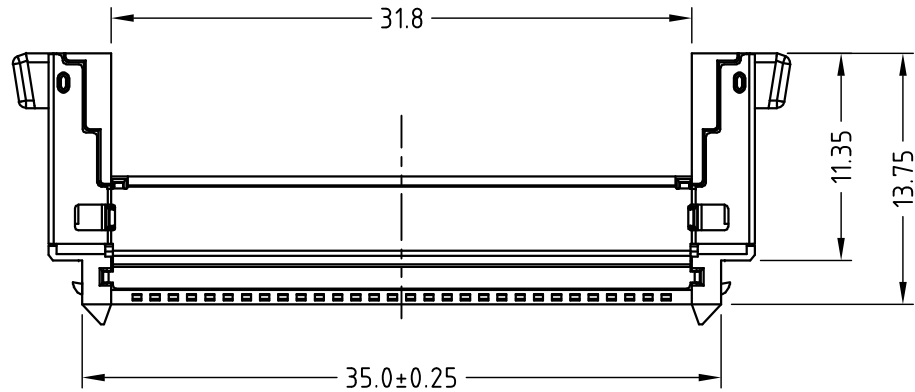

SPECIFICATIONS

1. CURRENT VOLTAGE: AC/DC 200V 1A
2. CONTACT RESISTANCE: 40mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC WITHSTANDING : AC 500V
5. OPERATING TEMPERATURE: -40°C ~+80°C

RoHS COMPLIANT

ITEM	DESC	Q'TY
③	LOCK:STAINLESS STEEL	2
②	SHELL:STAINLESS STEEL	1
①	HOUSING:Nylon 46 UL94V-0 BLACK	1

<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>	<p>Title 名稱: 1.00mm PH HOUSING</p>					
	DR: 制圖 Lijunhua	CHK'D 審核 Kenny_shi	APP'D 核准 Wang	REV. AO	UNIT mm [INCH]	SHEET 1/1
PART NUMBER 威納料號 A1012H-30P	CUSTOMER P/N 客戶料號 -	DATE 日期 Oct.02,07'	GENERAL TOLERANCE 一般公差			
DWG NO. 圖號 WP009-1103952-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	<p>ANGULAR ±3°</p>			
			<p>MM .XX = ±0.38 X.XX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED</p>			

A4

CUSTOMER DRAWING

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WINPOINT ELECTRONIC CORP. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION