
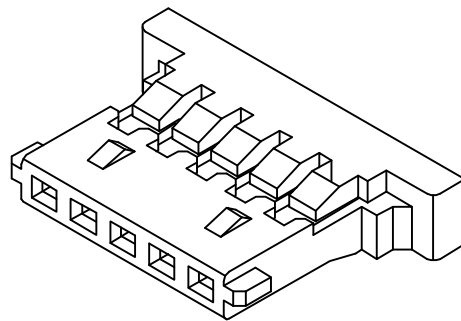





ENG.NO. W0007-1012138

Rev 版次	Revision note 變更內容	Date 日期	DR 制圖
A0	Original Release	Dec.08,05'	Xuzhihua

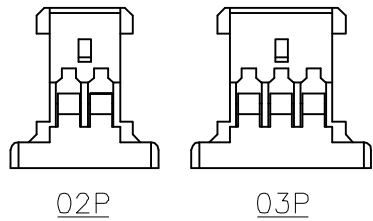

**SPECIFICATIONS**


1. CURRENT RATING: 1A AC,DC
2. VOLTAGE RATING: 125V AC,DC
3. INSULATION RESISTANCE: 100 MΩ. Min.
4. CONTACT RESISTANCE: 20mΩ Max.
5. DIELECTRIC WITHSTANDING VOLTAGE: 500V/AC.
6. MATERIAL: NYLON 66,UL94V-0 NATURAL(BEIGE)
7. OPERATING TEMPERATURE: -25°C~+85°C.

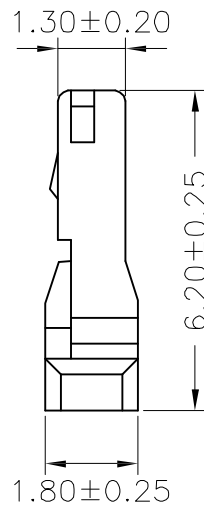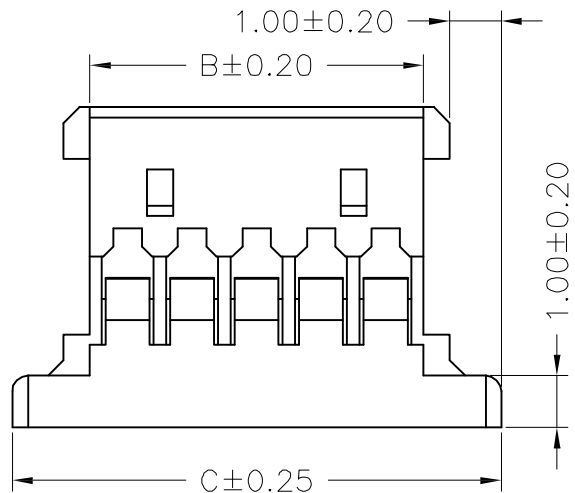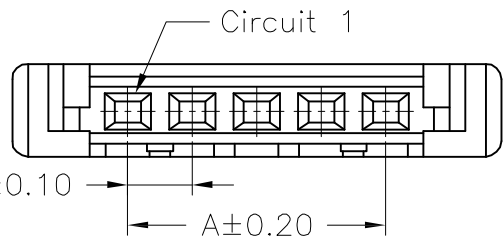

**Ordering Information & Dimensions**

Part No	Dimensions		
	A	B	C
A1254H-02P	1.25	2.72	5.72
A1254H-03P	2.50	3.97	6.97
A1254H-04P	3.75	5.22	8.22
A1254H-05P	5.00	6.47	9.47
A1254H-06P	6.25	7.72	10.72
A1254H-07P	7.50	8.97	11.97
A1254H-08P	8.75	10.22	13.22
A1254H-09P	10.00	11.47	14.47
A1254H-10P	11.25	12.72	15.72
A1254H-11P	12.50	13.97	16.97
A1254H-12P	13.75	15.22	18.22
A1254H-14P	16.25	17.72	20.72
A1254H-15P	17.50	18.97	21.97
A1254H-16P	18.75	20.22	23.22
A1254H-20P	23.75	25.22	28.22
A1254H-30P	36.25	37.72	40.72

RoHS COMPLIANT



<p>威納電子 WINPOINT ELECTRONIC CORP. www.winpoint.com.tw</p>		<p>Title 名稱 125 PH HOUSING</p>				
DR: 制圖 Xuzhihua	CHK'D 審核 Kenny_shi	APP'D 核准 Wang	REV. AO	UNIT mm [INCH]	SHEET 1/1	
PART NUMBER 威納料號 A1254H-XXP	CUSTOMER P/N 客戶料號 -	DATE 日期 Dec.08,05'	GENERAL TOLERANCE 一般公差			
DWG NO. 圖號 WP009-1012804-B	FILENAME 路徑 WP/009	SCALE 比例 N/A	ANGULAR ±3° <small>MM .XX = ±0.38 .XXX = ±0.18 X.XXX = ±0.05 INCH .XX = ±0.015 .XXX = ±0.007 .XXXX = ±0.0020 UNLESS OTHERWISE SPECIFIED</small>			